

# B-PAR38™

## DIMMABLE


### ANALOG DIMMING

10%



100%

### HIGH POWER FACTOR

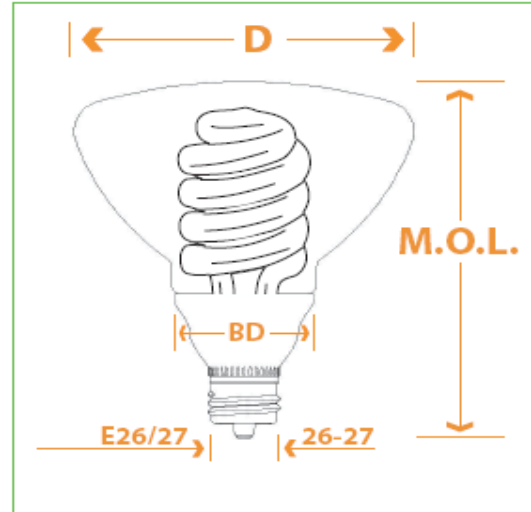

#### Technical Data: B-PAR 38™ ANALOG DIMMING™

CFL-B-PAR 38 Electronic, HPF, Medium Base (E26/27), 120VAC-50/60Hz, 8,000 Hours Average Life

Incandescent Equivalent

Item Number	Watts	Input Line Current At Full Power	Max Line Current When Dimming	Power Factor	THD	M.O.L. (inch)	D (inch)	BD (inch)	Colour Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
33819-ADIM	14	0.130 A	0.330 A	>0.70	<40%	5.875	3.625	2	2700	>82	700	44	65	725	11

#### APPLICATION INFORMATION:

TO BE USED WITH TRACK LIGHTS \* RECESSED CANS \* DRIVEWAYS \* WALKWAYS \* YARDS & GARDENS  
 OPEN & TOTALLY ENCLOSED FIXTURES \* USE WITH OCCUPANCY SENSORS MADE FOR COMPACT FLOURESCENT LAMPS  
 AND ANY DIMMER MADE AFTER 1995

#### Features and Benefits

- Dimmable in range of 100%-10% using ordinary dimmers
- New! Patented flicker-free ANALOG DIMMING™ system
- Reliable start at the lowest setting
- Colour Temperature of 2700°K- Matching Halogen PAR bulbs
- High Luminous Efficacy: Up to 45 Lm/W
- Wide range of operation ambient temperatures: -20°C - + 60°C
- New! Patented Amalgam Technology: Any working position with stable light output
- Superior Lumen Maintenance of 85% after 3200 hours of use
- Indoor or Outdoor



© Copyright 2008 NEPTUN LIGHT, Inc.

TERRA ENVIRONMENTAL LIGHTING  
 EMAIL: SALES@TERRALIGHTS.CA  
 TEL: (905) 339-3011

