

CFL-A19™ CFL-A21™

DIMMABLE


ANALOG DIMMING

10%



100%

HIGH POWER FACTOR

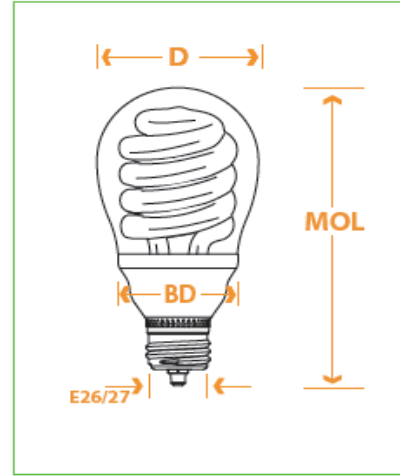

Technical Data: A19 & A21 ANALOG DIMMING™

CFL-A™ Electronic, Medium Base (E26/27), 120VAC-50/60Hz, 8,000 Hours Average Life

Incandescent Equivalent

Item Number	Watts	Input Line Current At Full Power	Max Line Current When Dimming	Power Factor	THD	M.O.L. (inch)	D (inch)	BD (inch)	Colour Temp. (°K)	RA	Lumens	Lm/W	Watts	Lumens	Lm/W
61916-ADIM	16	0.15A	0.30A	>0.70	<40%	5.0	2.375	1.57	2750	>82	900	55	70	950	14
32014-ADIM	14	0.13A	0.26A	>0.70	<40%	5.0	2.375	1.57	2750	>82	800	57	60	900	14

APPLICATION INFORMATION:

TO BE USED WITH TABLE LAMPS * PENDANT LAMPS * DESK LAMPS * OUTDOOR FIXTURES * TRACK LIGHTS * RECESSED CANS * WARDROBE CLOSETS * DRIVEWAYS * WALKWAYS * YARDS AND GARDENS * OPEN AND TOTALLY ENCLOSED FIXTURES * USE WITH OCCUPANCY SENSORS MADE FOR COMPACT FLUORSCENT LAMPS AND ANY DIMMER MADE AFTER 1995

Features and Benefits

- Dimmable in range of 100%-10% using ordinary dimmers
- New! Patented flicker-free ANALOG DIMMING™ system
- Reliable start at the lowest setting
- Patented design for direct replacement of incandescent light bulbs of A21 or A19 style
- High Luminous Efficacy: Up to 47 Lm/W
- Wide range of operation ambient temperatures: -20°C - + 60°C
- New! Patented Amalgam Technology: Any working position with stable light output
- Superior Lumen Maintenance of 85% after 3200 hours of use



© Copyright 2008 NEPTUN LIGHT, Inc.

TERRA ENVIRONMENTAL LIGHTING
 EMAIL: SALES@TERRALIGHTS.CA
 TEL: (905) 339-3011

