


# CFL-PAR™ 30

## DIMMABLE

**ANALOG DIMMING**

10%  100%

**HIGH POWER FACTOR**

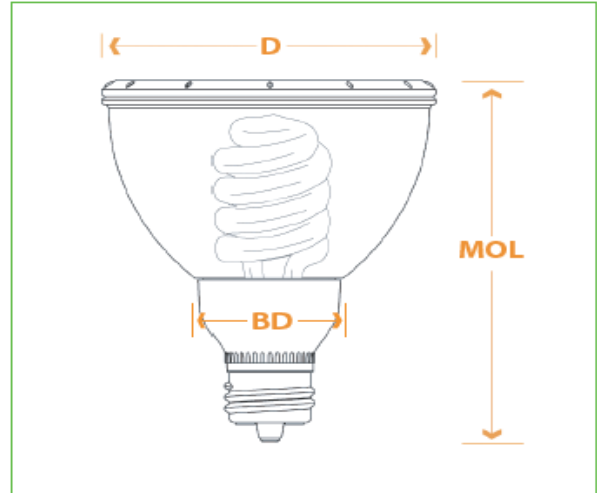

### Technical Data: CFL-PAR 30™ ANALOG DIMMING™

CFL-PAR 30 Electronic, HPF, Medium Base (E26/27), 120VAC-50/60Hz, 8,000 Hours Average Life													Incandescent Equivalent		
Item Number	Watts	Input Line Current At Full Power	Max Line Current When Dimming	Power Factor	THD	M.O.L. (inch)	D (inch)	BD (inch)	Colour Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
93014-ADIM	14	0.140 A	0.33 A	>0.70	<40%	5.125	3.75	1.875	2850	>82	600	43	x	x	13
93016-ADIM	16	0.150 A	0.40 A	>0.70	<40%	5.125	3.75	1.875	2850	>82	640	40	45	630	14
93019-ADIM	19	0.200 A	0.45 A	>0.70	<40%	5.125	3.75	1.875	2850	>82	775	41	60	775	x

APPLICATION INFORMATION: TO BE USED WITH TRACK LIGHTS \* RECESSED CANS \* DRIVEWAYS \* WALKWAYS \* YARDS & GARDENS  
 OPEN & TOTALLY ENCLOSED FIXTURES \* USE WITH OCCUPANCY SENSORS MADE FOR COMPACT FLOURESCENT LAMPS  
 AND ANY DIMMER MADE AFTER 1995

### Features and Benefits

- Dimmable in range of 100%-10% using ordinary dimmers
- New! Patented flicker-free ANALOG DIMMING™ system
- Reliable start at the lowest setting
- Colour Temperature of 2850°K- Matching Halogen PAR bulbs
- High Luminous Efficacy: Up to 43 Lm/W
- Wide range of operation ambient temperatures: -20°C - + 60°C
- New! Patented Amalgam Technology: Any working position with stable light output
- Superior Lumen Maintenance of 85% after 3200 hours of use
- Indoor or Outdoor



© Copyright 2008 NEPTUN LIGHT, Inc.

TERRA ENVIRONMENTAL LIGHTING  
 EMAIL: SALES@TERRALIGHTS.CA  
 TEL: (905) 339-3011

