

HELIX™


ELECTRONIC BULB

ANALOG DIMMING

10%

100%

HIGH POWER FACTOR

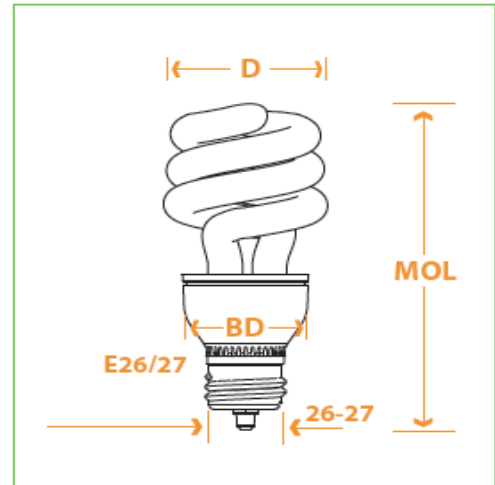

Technical Data: HELIX

HELIX Electronic, NPF, Medium Base (E26/27), 120VAC-50/60Hz, 8,000 Hours Average Life													Incandescent Equivalent		
Item Number	Watts	Input Line Current At Full Power	Max Line Current When Dimming	Power Factor	THD	M.O.L. (inch)	D (inch)	BD (inch)	Colour Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
24514-ADIM*	14	0.130A	0.260A	>0.70	<40%	4.625	1.750	1.73	2700	>82	800	57	60	900	15
24518-ADIM	18	0.170A	0.340A	>0.70	<40%	4.875	2.000	1.73	2700	>82	1100	61	75	1150	15
24524-ADIM	24	0.220A	0.440A	>0.70	<40%	4.625	4.750	1.73	2700	>82	1500	63	100	1500	15

APPLICATION INFORMATION: TO BE USED WITH TABLE LAMPS * PENDANT LAMPS * DESK LAMPS * TRACK LIGHTS * RECESSED CANS * WARDROBE CLOSETS * OPEN AND TOTALLY ENCLOSED FIXTURES *

Features and Benefits

- Compact DFL with FULL LIGHT OUTPUT
- Saves up to 80% energy with comparable light output
- Colour Temperature of 2700°K (matches incandescent light bulb) or 4100K
- New! Patented Amalgam Technology
- High Luminous Efficacy: 66 Lm/W
- Rapid start with End of Life Protection and Electronic Preheat
- Superior Lumen Maintenance



© Copyright 2008 NEPTUN LIGHT, Inc.

TERRA ENVIRONMENTAL LIGHTING
 EMAIL: SALES@TERRALIGHTS.CA
 TEL: (905) 339-3011

